


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit or Application Circuit

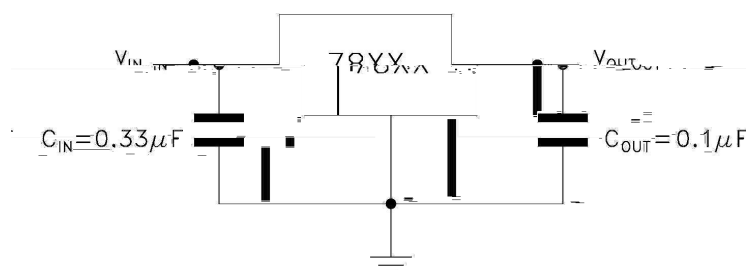

/ Pinning



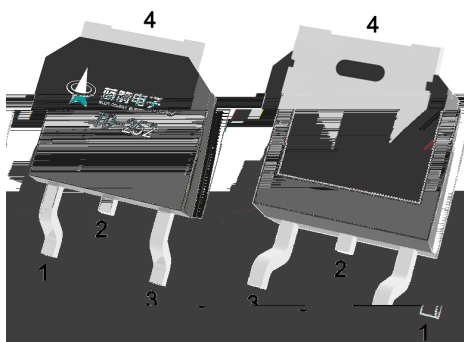


/ Marking


/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25 Vi=23V,Io=500mA unless otherwise specified)

/ Electrical Characteristic Curve

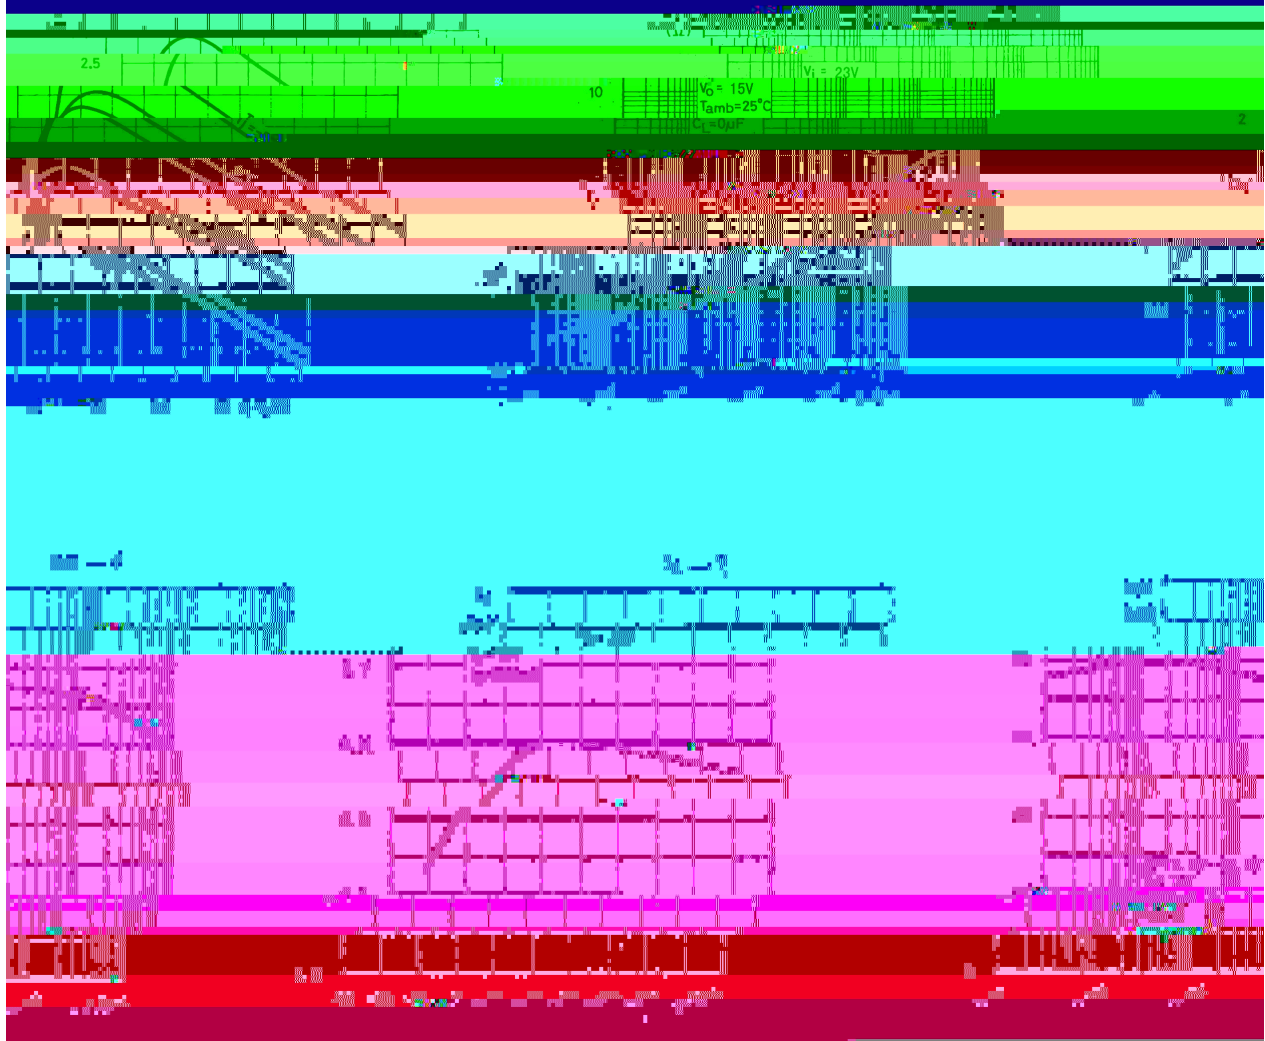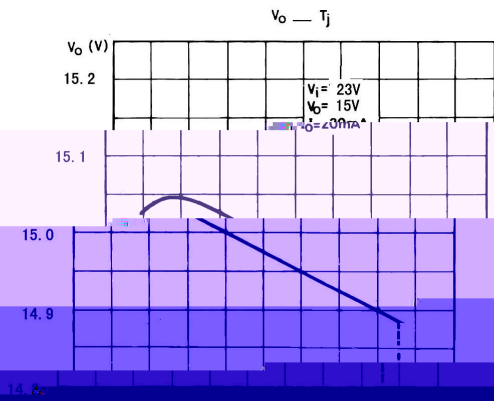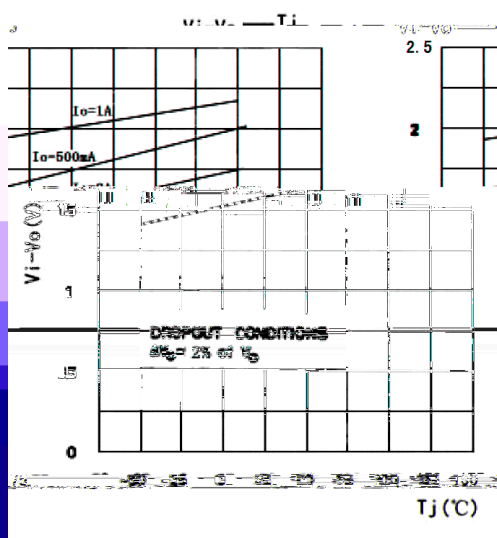

/ Package Dimensions

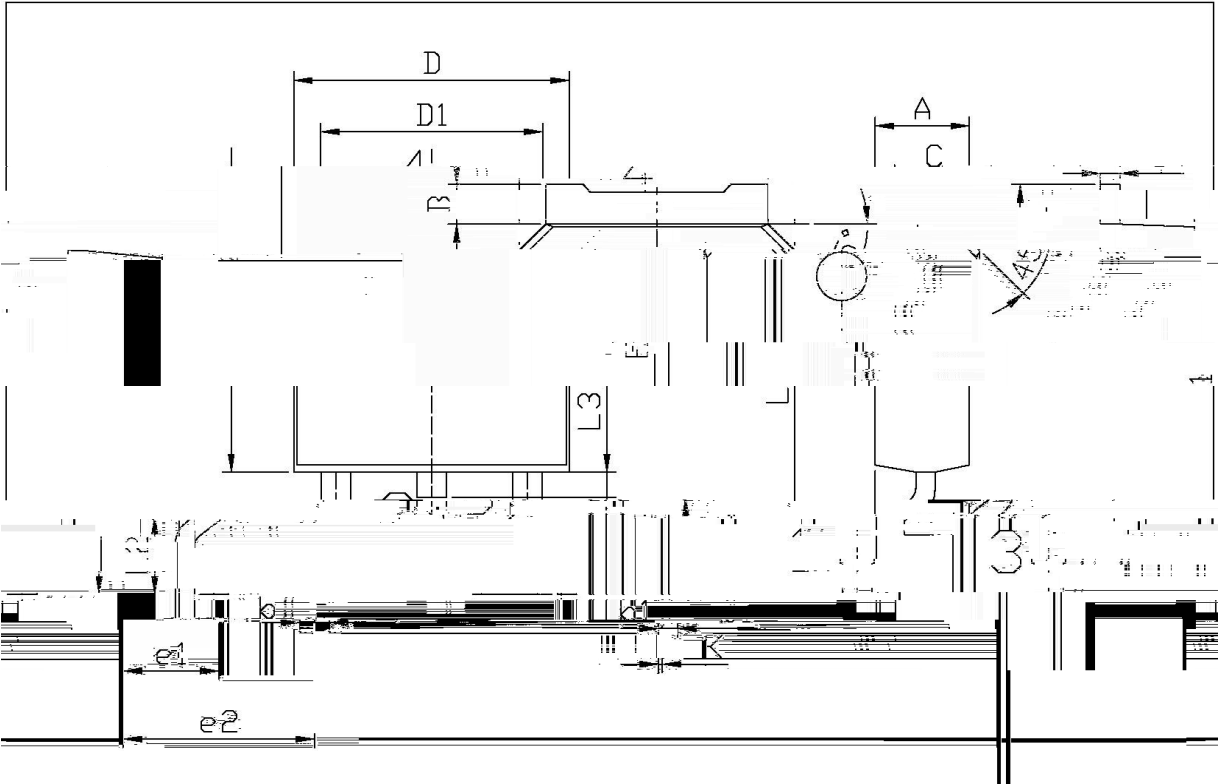


单位：mm


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	5.95	6.25	A	2.20	2.40
B	0.95	1.25	e1	2.24	2.34
C	0.70	0.90	e2	4.42	4.73
D	0.45	0.55	L1	9.85	10.00
D1	5.10	5.50	L2	1.70	2.00
E	6.45	6.75	L3	0.50	0.60
K	0.00	0.10			

T0=25.2

/ Marking Instructions

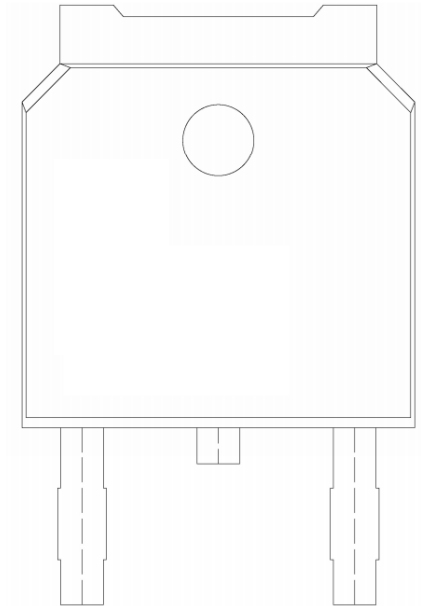

() /

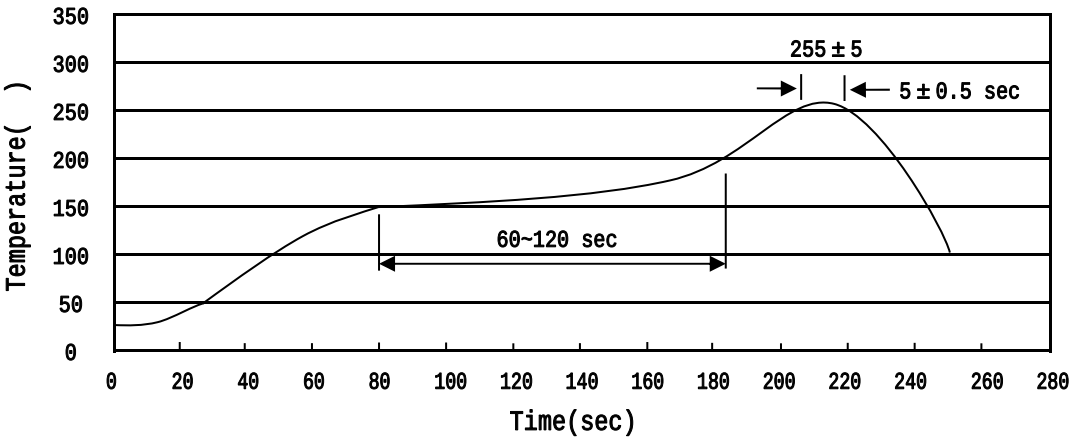

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

BR78D15Q

/ Notices